

2020 RFQ - FTU0003679

Technical Documentation

Duty/Tactical Holsters & Magazine Pouches

Submission by:



PROPRIETARY
and
CONFIDENTIAL

CONTENTS

I. Concealment Holster Submissions

1. BlackPoint Tactical OWB

- A. 19M RH/LH - BP1R/BP1L
- B. 17M RH/LH - BP2R/BP2L

2. Crucial Concealment OWB

- A. 19M RH/LH - CR1R/CR1L
- B. 17M RH/LH - CR2R/CR2L

II. Double Magazine Pouch

1. BlackPoint Tactical DBL (G17M) - BP3

2. BlackPoint Tactical DBS (G19M) - BP5

III. BlackPoint Tactical Single Magazine Pouch - BP4

IV. Weights and Measures

V. Order Reference and SKUs

I. CONCEALMENT HOLSTER

1A. BP1R - BlackPoint Tactical OWB - G19M (RH)








Features:

1. 0.093" KYDEX® for durability and heat resistance
2. Vertical (0°) draw with 15° adjustment
3. Hytrel 6356 polymer loops with tapered 1.5-1.75" accommodation for toughness and all day comfort
4. Tension adjustment screw
5. 0-15° Paddle attachment
6. Full trigger guard and sweat guard coverage

HOLSTER SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

4 x		Stainless Steel Clutch Post, #8-32, 0.125"
4 x		8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
1 x		8-32 X 0.4375" P TR MS SS BL LE (with LocPatch)
1 x		Black EPDM Rubber (0.500"x0.180"x0.375")
1 x		#8-32, 0.250",Stainless Steel Slotted Post



HOLSTER SPECIFICATIONS

B. HOLSTER ADJUSTMENTS & ATTACHMENTS

1. Paddle Attachment Boss, adjustment from 0-15°
2. Hytrel 6356 Tapered Loops Boss
A: Vertical Draw
B: 15° Cant
3. Retention Adjustment 0 to 12-lbs with clockwise rotation of screw



Paddle Attachment



15° Cant

HOLSTER SPECIFICATIONS

C. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness

3. Glock M Model

4. Batch Unit Number (0-99999)

5. Hand Designation

6. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



VARIANTS

BP1L - LH Front & Back



BP1R - RH Paddle Attached - Straight & 15° Cant



I. CONCEALMENT HOLSTER

1B. BP2R - BlackPoint Tactical OWB - G17M (RH)




Features:

1. 0.093" KYDEX® for durability and heat resistance
2. Vertical (0°) draw with 15° adjustment
3. Hytrel 6356 polymer loops with tapered 1.5-1.75" accommodation for toughness and all day comfort
4. Tension adjustment screw
5. 0-15° Paddle attachment
6. Full trigger guard and sweat guard coverage


HOLSTER SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE


- 4 x




Stainless Steel Clutch Post, #8-32, 0.125"
- 4 x




8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
- 1 x



8-32 X 0.4375" P TR MS SS BL LE (with LocPatch)
- 1 x



Black EPDM Rubber (0.500"x0.180"x0.375")
- 1 x



#8-32, 0.250",Stainless Steel Slotted Post



HOLSTER SPECIFICATIONS

C. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness

3. Glock M Model

4. Batch Unit Number (0-99999)

5. Hand Designation

6. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



VARIANTS

BP2L - LH Front & Back



BP2R - RH Paddle Attached - Straight & 15° Cant



I. CONCEALMENT HOLSTER

2A. CR1R - Crucial Concealment OWB - G19M (RH)







Features:

1. 0.093" KYDEX® for durability and heat resistance
2. Vertical (0°) draw with 15° adjustment
3. Hytrel 6356 polymer loops for flexibility, toughness, and all-day comfort with 1.5" and 1.75" belt accommodation
4. Tension adjustment screw
5. Full trigger guard and sweat guard coverage

HOLSTER SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

- 5 x  #8-32, 0.250",Stainless Steel Slotted Post
- 4 x  #8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
- 1 x  #8-32 X 0.4375 P TR MS SS BL LE (with LocPatch)
- 1 x  Black EPDM Rubber (0.500"x0.180"x0.480")



HOLSTER SPECIFICATIONS

B. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness

3. Glock M Model

4. Batch Unit Number (0-99999)

5. Hand Designation

6. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



VARIANTS

CR1L - LH 0° Front & Back



CR1R- RH 15° Front & Back



VARIANTS (cont.)

CR1R - RH 1.75" Belt Loop Setup (15°)



CR1R - RH 1.75" Belt Loop Setup (0°)



PROPRIETARY
and
CONFIDENTIAL

I. CONCEALMENT HOLSTER

2B. CR2R - Crucial Concealment OWB - G17M (RH)







Features:

1. 0.093" KYDEX® for durability and heat resistance
2. Vertical (0°) draw with 15° adjustment
3. Hytrel 6356 polymer loops for flexibility, toughness, and all-day comfort with 1.5" and 1.75" belt accommodation
4. Tension adjustment screw
5. Full trigger guard and sweat guard coverage

HOLSTER SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

- 5 x  #8-32, 0.250",Stainless Steel Slotted Post
- 4 x  #8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
- 1 x  #8-32 X 0.4375 P TR MS SS BL LE (with LocPatch)
- 1 x  Black EPDM Rubber (0.500"x0.180"x0.480")



HOLSTER SPECIFICATIONS

B. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness

3. Glock M Model

4. Batch Unit Number (0-99999)

5. Hand Designation

6. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



VARIANTS

CR2L - LH 0° Front & Back



CR2R- RH 15° Front & Back



VARIANTS (cont.)

CR2R - RH 1.75" Belt Loop Setup (15°)



CR2R - RH 1.75" Belt Loop Setup (0°)



II. DBL MAGAZINE POUCH

1. BP3 - BlackPoint Tactical DBL (17M)








Features:

1. 0.093" KYDEX® for durability and heat resistance
2. 19M and 17M ambidextrous magazine fitment
3. Hytrel 6356 polymer loops with tapered 1.5-1.75" accommodation for toughness and all day comfort
4. Retension adjustment screw
5. Paddle attachment
6. Additional side retention adjustment screws

DBL SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

- 6 x  Stainless Steel Clutch Post, #8-32, 0.125"
- 6 x  8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
- 1 x  8-32 X 0.4375" P TR MS SS BL LE (with LocPatch)
- 1 x  Black EPDM Rubber (0.500"x0.180"x0.480")
- 1 x  Stainless Steel Clutch Post, #8-32, 0.375"



DBL SPECIFICATIONS

B. PRODUCTION TRACKING AND QUALITY CONTROL

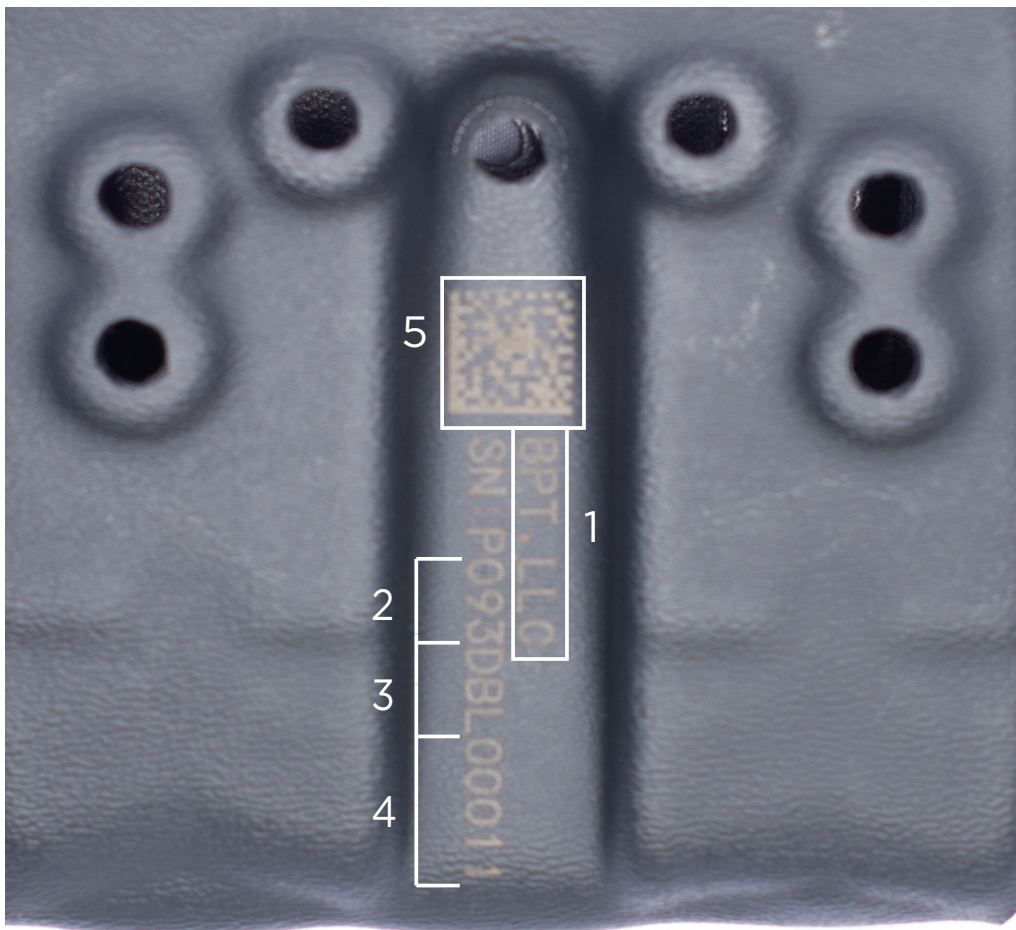
- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness
3. Magazine Pouch Size
4. Batch Unit Number (0-999999)
5. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



DBL VARIANTS

BP3-DBL 19M/17M Left Facing & Right Facing



****Retention adjustment must be made for optimizing fitment when switching magazines from left to right facing by looseing and tightening the side adjustment screws.**

BP3-DBL 19M/17M Paddle Attachment



II. DBS MAGAZINE POUCH

2. BP5 - BlackPoint Tactical DBS (19M)









Features:

1. 0.093" KYDEX® for durability and heat resistance
2. 19M and 17M ambidextrous magazine fitment
3. Hytrel 6356 polymer loops with tapered 1.5-1.75" accommodation for toughness and all day comfort
4. Retension adjustment screw
5. Paddle attachment
6. Additional side retention adjustment screws
7. 50% Magazine coverage

DBL SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

6 x		Stainless Steel Clutch Post, #8-32, 0.125"
6 x		8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
1 x		8-32 X 0.4375" P TR MS SS BL LE (with LocPatch)
1 x		Black EPDM Rubber (0.500"x0.180"x0.480")
1 x		Stainless Steel Clutch Post, #8-32, 0.375"

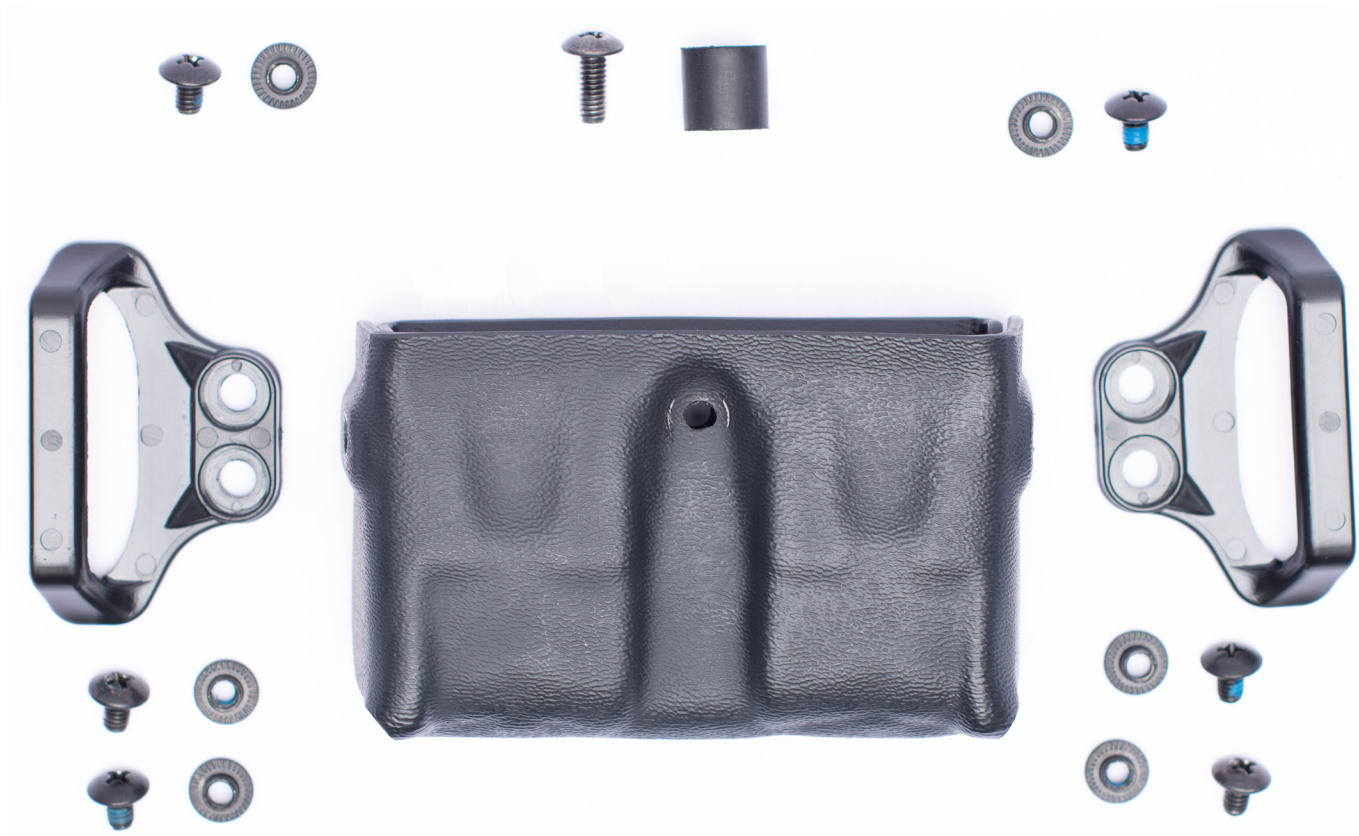

DBS SPECIFICATIONS

B. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

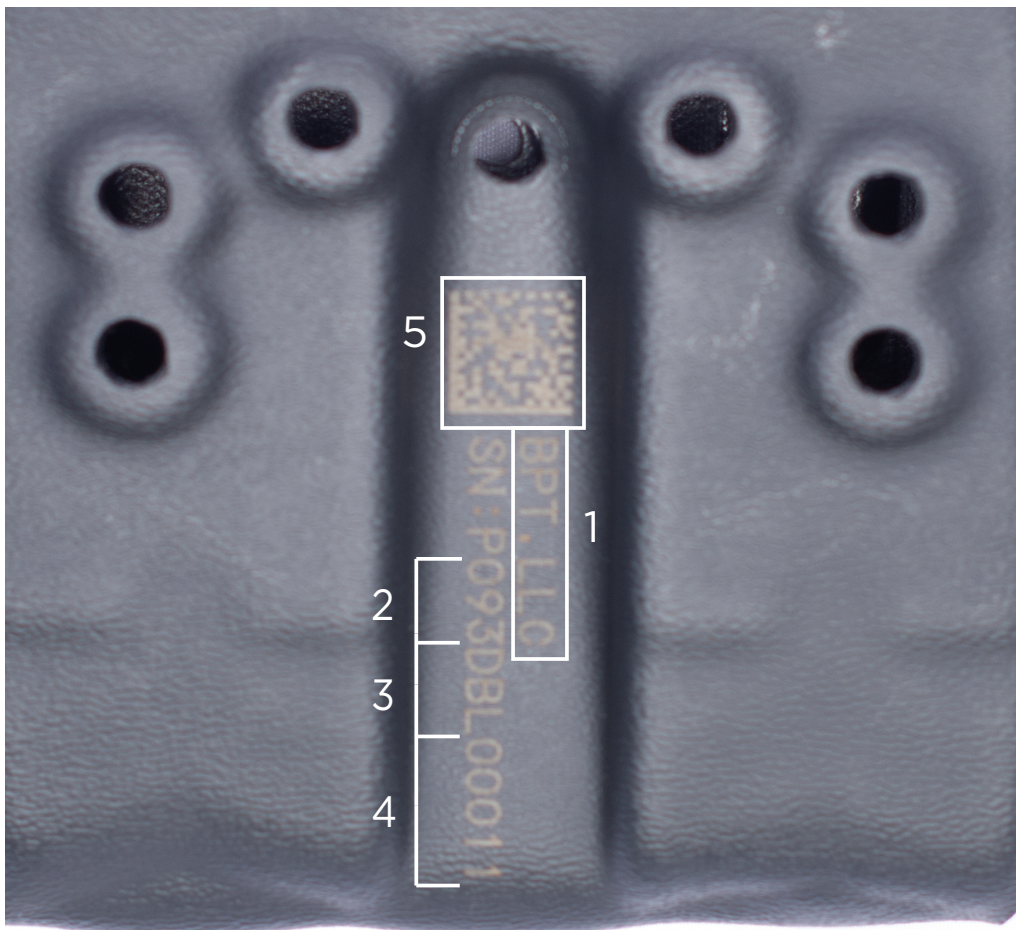
2. Material Thickness

3. Magazine Pouch Size

4. Batch Unit Number (0-999999)

5. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



DBS VARIANTS

BP5-DBS 19M/17M Right Facing & Left Facing



****Retention adjustment must be made for optimizing fitment when switching magazines from left to right facing by looseing and tightening the side adjustment screws.**

BP5-DBS 19M/17M Paddle Attachment



III. SINGLE MAG POUCH

BP4 - BlackPoint Tactical SINGLE MAG (19M/17M)









Features:

1. 0.093" KYDEX® for durability and heat resistance
2. 19M and 17M ambidextrous magazine fitment (RH/LH)
3. Extra tough nylon-66 belt clip
4. OWB/IWB compatible
5. Side adjustment retention screws

SIN. MAG SPECIFICATIONS

A. HOLSTER COMPONENTS & HARDWARE

2 x		Stainless Steel Clutch Post, #8-32, 0.125"
2 x		8-32 X 0.250" P TR MS SS BL LE (with LocPatch)
2 x		Black EPDM Rubber (0.500"x0.180"x0.093")
2 x		8-32 X 0.375" P TR MS SS BL LE (with LocPatch)
2 x		Black EPDM Rubber (0.500"x0.180"x0.375")
2 x		Stainless Steel Clutch Post, #8-32, 0.375"



SIN. MAG SPECIFICATIONS

B. PRODUCTION TRACKING AND QUALITY CONTROL

- During production each holster is marked with the following trackable identifiers shown in the diagram below:

1. Manufacturer

Serial Number:

2. Material Thickness

3. Magazine Pouch Size

4. Batch Unit Number (0-99999)

5. Internal QR Code sequence: Date/Product SKU/Batch Unit #

- Production Batches are quality checked at 3 intervals; assembly, final fit and function, and shipping. Once approved, batches are scanned and logged.



SIN. MAG VARIANTS

BP4-SIN. MAG 19M/17M Dual Fitment



****Retention adjustment must be made for optimizing fitment when switching magazines from left to right facing by looseing and tightening the side adjustment screws.**

BP4-SIN. MAG 19M/17M CLIP ADJUSTMENT



IV. WEIGHTS & MEASURES

In compliance with with FTU0003679 Testing Protocols Phase II - Pass/Fail Tests each holster and magazine pouch were subjected to a various environmental extremes for viability.

1. Salinity and Corrosion

A sample holster from each submission category was placed in synthetic salt (Instant Ocean®) water at 1.023 specific gravity as measured by a hydrometer for 8 minutes. Afterwards holsters were palced in an environmentally controlled room for 3 hours, then submerged in tap water and immediately returned to the room for 28 hours.

No signs of corrosion where witnessed on the stainless steel hardware nor was there any degradation of the holster material, KYDEX®.

2. Drop Test

A sample holster from each submission category was dropped into a box of sand from 4 different orientations. No degradation of the holster was witnessed.

BP-2

CR-2

3. Grab Test - A sample holster from each submission category was fixed to a base and inverted. A 10-lb weight was attached to the firearm and left to hang. The firearm did not fall free.

**In compliance with this test ALL Holsters set to hold 10-lbs



4. Weights - oz.



BP2- 2.92oz.



CR2- 3.40oz.



BP4- 3.15oz.

V. ORDER REF. & SKU's

BlackPoint Tactical OWB:

19M RH - Tech Ref: BP1R
BPT P/N: 131008
UPC: 191107310083

19M LH - Tech Ref: BP1L
BPT P/N: 131009
UPC: 191107310090

17M RH - Tech Ref: BP2R
BPT P/N: 131006
UPC: 191107310069

17M LH - Tech Ref: BP2L
BPT P/N: 131007
UPC: 191107310076

Crucial Concealment OWB:

19M RH - Tech Ref: CR1R
Crucial P/N: 1148
UPC: 810015551486

19M LH - Tech Ref: CR1L
Crucial P/N: 1149
UPC: 810015551493

17M RH - Tech Ref: CR2R
Crucial P/N: 1146
UPC: 810015551462

17M LH - Tech Ref: CR2L
Crucial P/N: 1147
UPC: 810015551479

BlackPoint Tactical DBL:

17M RH - Tech Ref: BP3R
BPT P/N: 131014
UPC: 191107310144

17M LH - Tech Ref: BP3L
BPT P/N: 131015
UPC: 191107310151

BlackPoint Tactical DBS:

19M RH - Tech Ref: BP5R
BPT P/N: 131016
UPC: 191107310168

19M LH - Tech Ref: BP5L
BPT P/N: 131017
UPC: 191107310175

BlackPoint Tactical Single Mag:

19/17M RH - Tech Ref: BP4R
BPT P/N: 131019
UPC: 191107310199

19/17M LH - Tech Ref: BP4L
BPT P/N: 131020
UPC: 191107310205